
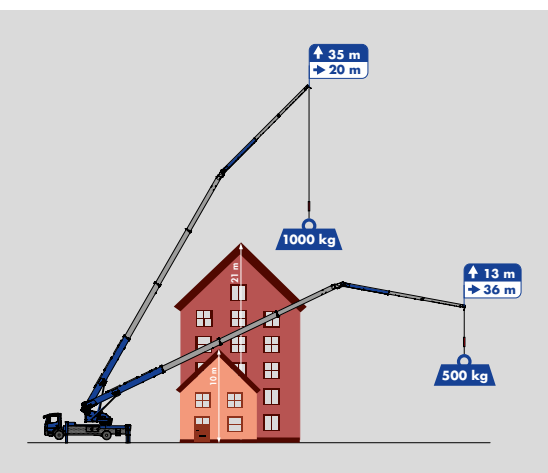


K950 RSX

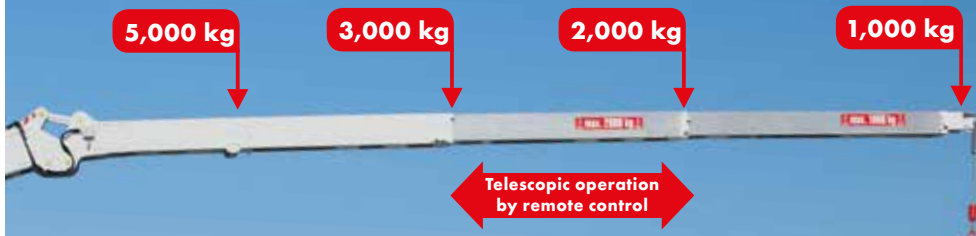

Hook Height 41.4m/Boom Length 43.2m

Max. Capacity 5,000 kg

36 m Working Radius with 500 kg



K950 RSX


Equipment



TFR Boom System



V-Outriggers



Automatic Levelling



Hydr. Telescoping Folding Jib



Two Folding Jib Cylinders



Double Derricking Cylinders



Telescopic Winch



Cable Carrier



Crane Operation Device



XL Radio Remote Control



Drive Concept



Extendable Counterweight



Fully Enclosed



Working Platform (opt.)



Customized Equipment (opt.)

Technical Information

Load Capacity (stand./optional)	3.0/5.0 t
Hook Height	41.40 m
Boom Length	43.24 m
Outrigger Width (min.)	2.55 m
Outrigger Width (max.)	5.47 m
Winch Capacity	3,000 kg
Boom (3,000kg)	5.52 m
Extension 1 (2,000kg)	8.69 m
Extension 2 (1,000kg)	12.29 m
Total Truck Weight *(min.)	≥ 14.99 t

*depending on truck model

Working Range


Load	Working Radius	Height
3,000 kg	9.00 m	32.00 m
2,000 kg	16.50 m	27.50 m
1,000 kg	26.00 m	24.00 m
500 kg	36.00 m	13.00 m

Working Range 5t Capacity*

Load	Working Radius	Height
5,000 kg	6.50 m	11.00 m
3,500 kg	9.00 m	7.00 m



*with 2-fall

Working Range Diagram

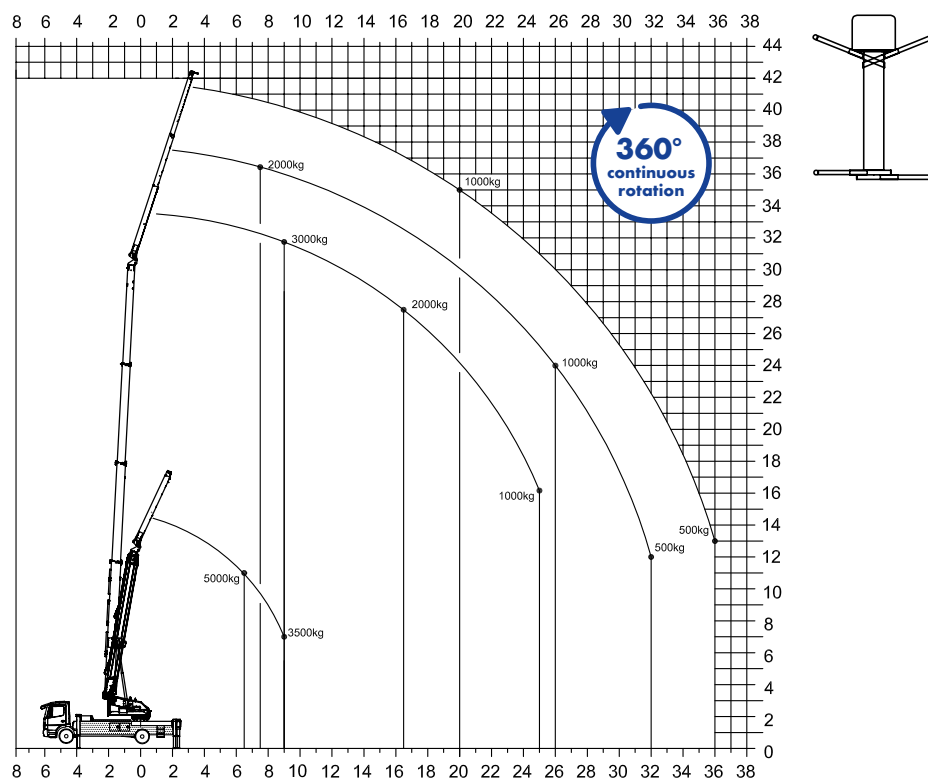

Platform Operation (HA 3/300)

Platform Operation (HA 3/300)
Folding Jib First Section Extended

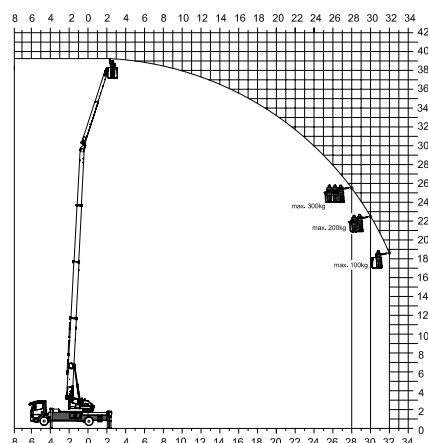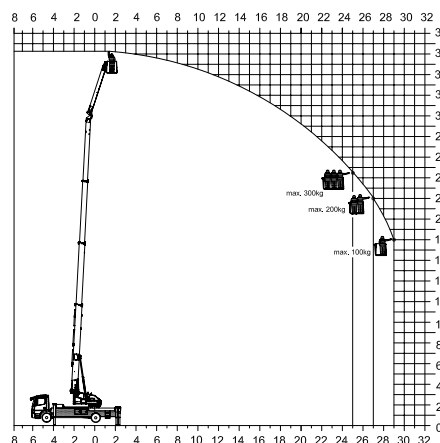

Distributor UK and Ireland

Kranlyft UK Ltd, Unit 1, IO Centre, Cabot Park, Avonmouth, Bristol, BS11 0QL
Tel: +44 (0)117 982 6661 Fax: +44 (0)117 982 9173
info@kranlyft.co.uk