




Klaas

K910



Working range

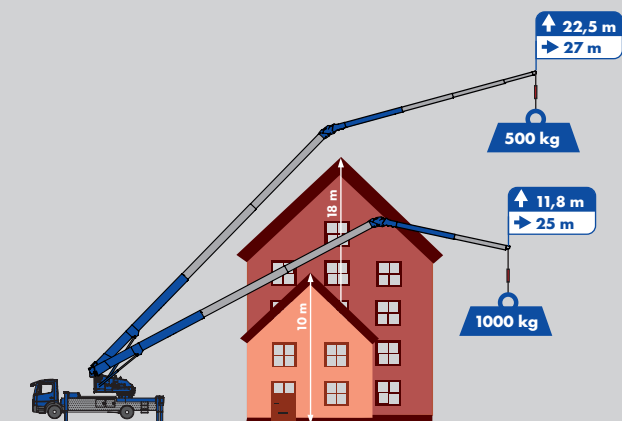


▶ Hook height 39.2 m / Boom length 40 m

▶ Double hydraulic telescopic fly jib

▶ 29.8 m Working range with 500 kg

Working range diagram

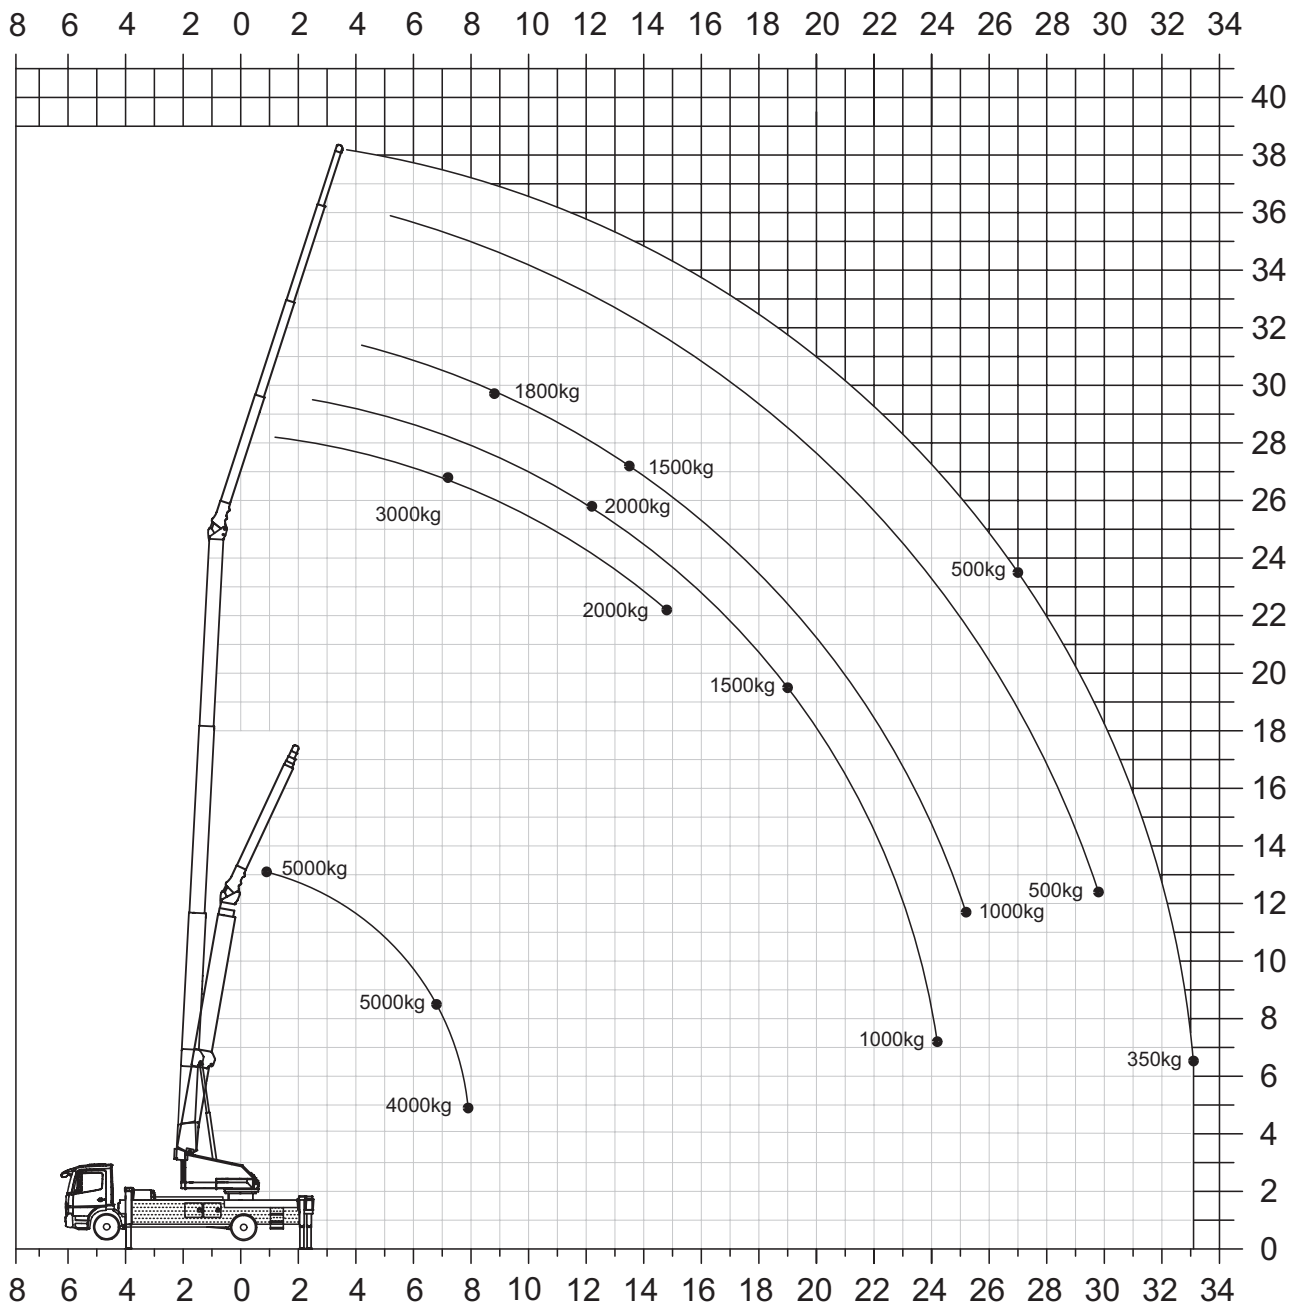

Working range crane operation


Load	Range	Height
350 kg	33.00 m	6.50 m
500 kg	29.80 m	12.50 m
1,000 kg	25.00 m	11.80 m
1,500 kg	19.00 m	19.50 m
2,000 kg	15.00 m	22.00 m
3,000 kg	7.00 m	26.80 m

Working range two fall operation (opt.)

Load	Range	Height
4,000 kg	8.00 m	5.00 m
5,000 kg	7.00 m	8.50 m

Working range vary, depending on truck type.

Platform operation

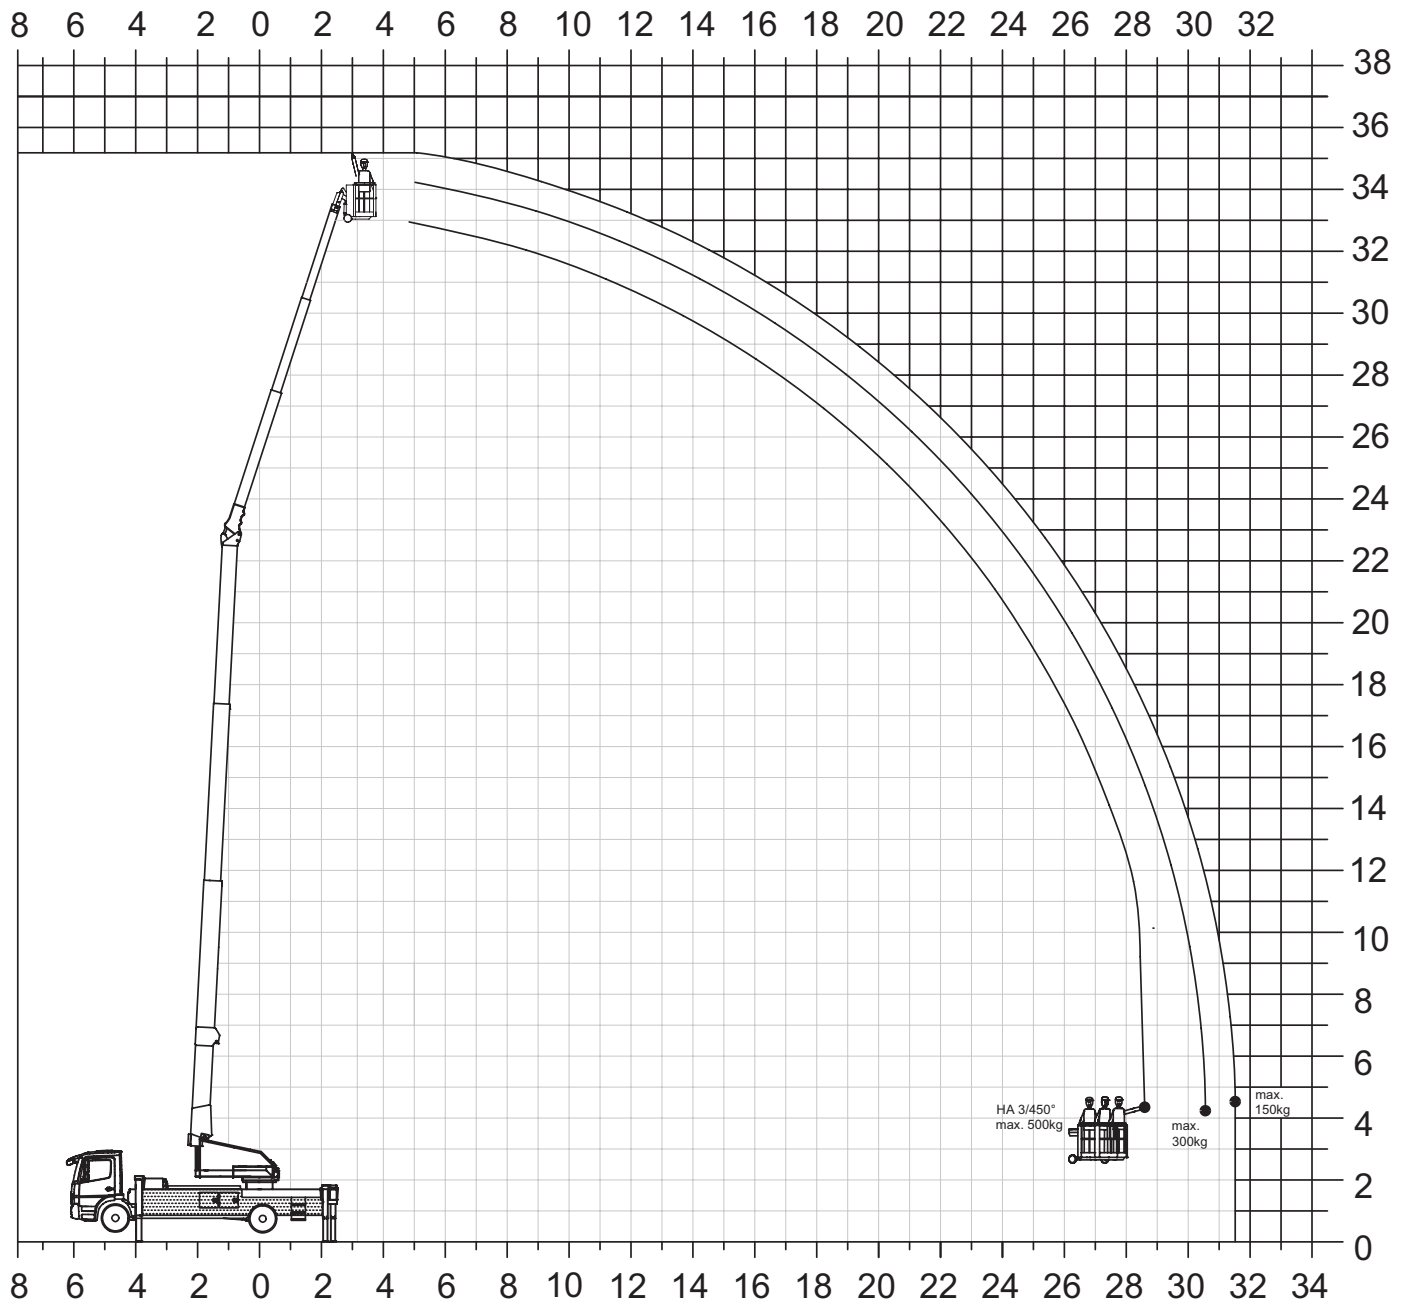

Working range HA 3/450°

Load	Range	Height
500 kg	28.50 m	4.20 m
300 kg	30.50 m	4.20 m
150 kg	31.50 m	4.50 m
max. Working height		35.50 m



KLADS

K910

Technical specifications

Load capacity	
Hook load	3,000 kg
Two fall operation (optional)	5,000 kg
Winch Capacity	3,000 kg

Boom	
 Hook height	39.20 m
 Boom length	40.00 m
 Working height up to the boom	25.00 m
Swivel range	continuous rotation

Fly jib	
Fly jib (3,000 kg)	5.40 m
Extension 1+2 (3,000 kg - 1,500 kg)	5.40 - 12.04 m
Extension 3 (350 kg)	13.78 m


V-Outriggers	
 Outriggers (max.) L x B	6.47 x 6.14 m
 Outrigger width (min.)	3.34 m
 Outrigger width 1-sided support	4.74 m

Drive concepts	
D	separate diesel engine
E	Battery powered electric motor


Truck	
Truck* Total weight (min.)	≥ 18.00 t

*depending on truck type


Fly jib

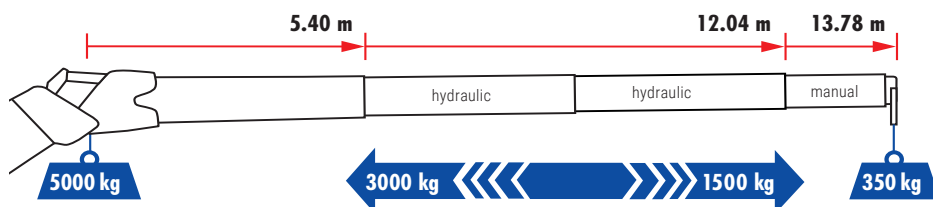

Outriggers

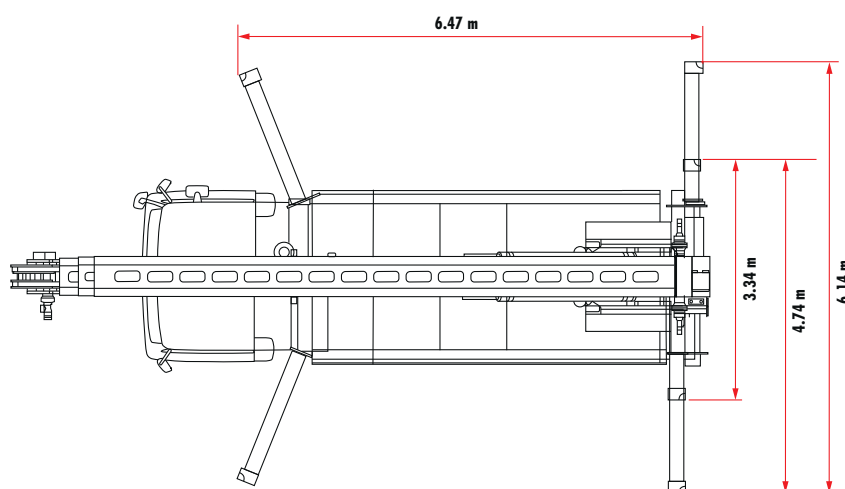

Truck (MAN)

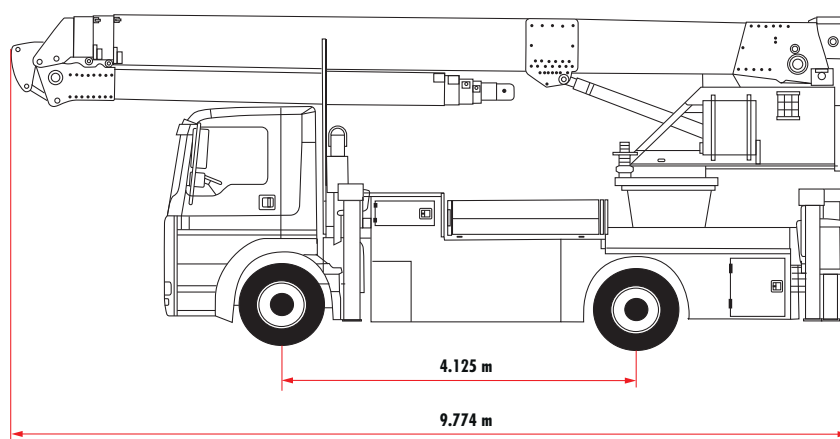

Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.

04/2025



K910



kranlyft.com/contact